

Machine Tools



Machine Tools

OUTLETS NATIONWIDE

518

Machine Tools

At TradeCounter you will find a solution for just about any drilling application. From the toughest steel to concrete, granite, glass and wood.

We also stock the widest range of taps and dies and related accessories



Drill Presses



Cut-off Saw



Bandsaw



Mini-Lathe

Specifications:

Chuck Capacity (mm):	16
Swing (mm):	324
Spindle Taper:	MT2
Speed rpm (50HZ):	16 (220-2840)
Speed rpm (60HZ):	16 (260-3410)
Spindle Travel (mm):	85
Column Diameter (mm):	72
Table Size (mm):	Ø290
Base Size (mm):	460 x 272
Motor:	550W
Height (mm):	1580


Code
POW1200
Specification:

Chuck Capacity (mm):	20
Swing (mm):	360
Spindle Taper:	MT3
Speed rpm (50HZ):	12 (280-2380)
Speed rpm (60HZ):	12 (340-2860)
Spindle Travel (mm):	85
Column Diameter (mm):	80
Table Size (mm):	290 x 290
Base Size (mm):	460 x 272
Motor:	750W
Height (mm):	1600


Code
POW1220
Specifications:

Motor power	250W
Chuck	13mm
Spindle Travel	50mm
Spindle Taper	B16
Speed change	5
Speed 50/60Hz	620~2620, 740~3140r/min
Swing	210mm 8"
Working Table	160mmx160mm
Base	290x190mm
Column	Φ46mm
Total Height	590mm


Code
POW1250
Specification:

Motor Power	3000W
Voltage	380V
Cutting Capacity	Φ50Φ120 100X10
Cutting Disc	Φ400MM
Motor Speed 50/60Hz	2900/3480rpm
Speed 50/60Hz	60m/s
Vise Angle	45°~0~45°
Base Size	610x330mm


Code
POW1600

Specifications:

Model No.	GFW5018
Motor power	1100W
Cutting Capacity	Φ180MM 180X260MM
Speed	43/68M/MIN
Speed Change	2
Vice Angle	0°~45°
Blade size	2413x19x0.9mm



Code


POW1060

VARIABLE SPEED READOUT MINI-LATHE

- Spindle speed readout
- High power DC motor
- Variable speed
- Induction harden bedway
- Imported speed control unit
- 350mm between centres
- Hobbyist lathe

Code

POW1420

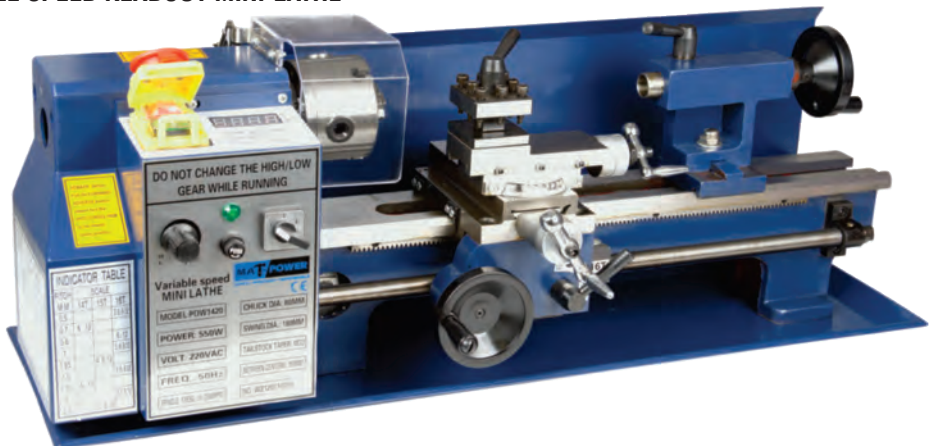

Specification:

Distance between centres	350mm	Tool slide travel	35mm
Swing over bed	180mm	Range of metric threads	0.5-2.5mm
Swing over corss slide	110mm	Range of imperial threads	12-52TPI
Spindle taper	MT3	Spindle accuracy	0.01MM
Tailstock taper	MT2	Spindle speed	50-2500/100-2500RPM
Chuck diameter	80mm	Power of motor	550W
Spindle bore	20mm	Voltage/Frequency	230V/50HZ
Cross slide travel	65mm		